


OERTZEN®

... for a cleaner world ☀

OERTZEN D 500-30 Cold Water HP Aggregate Diesel

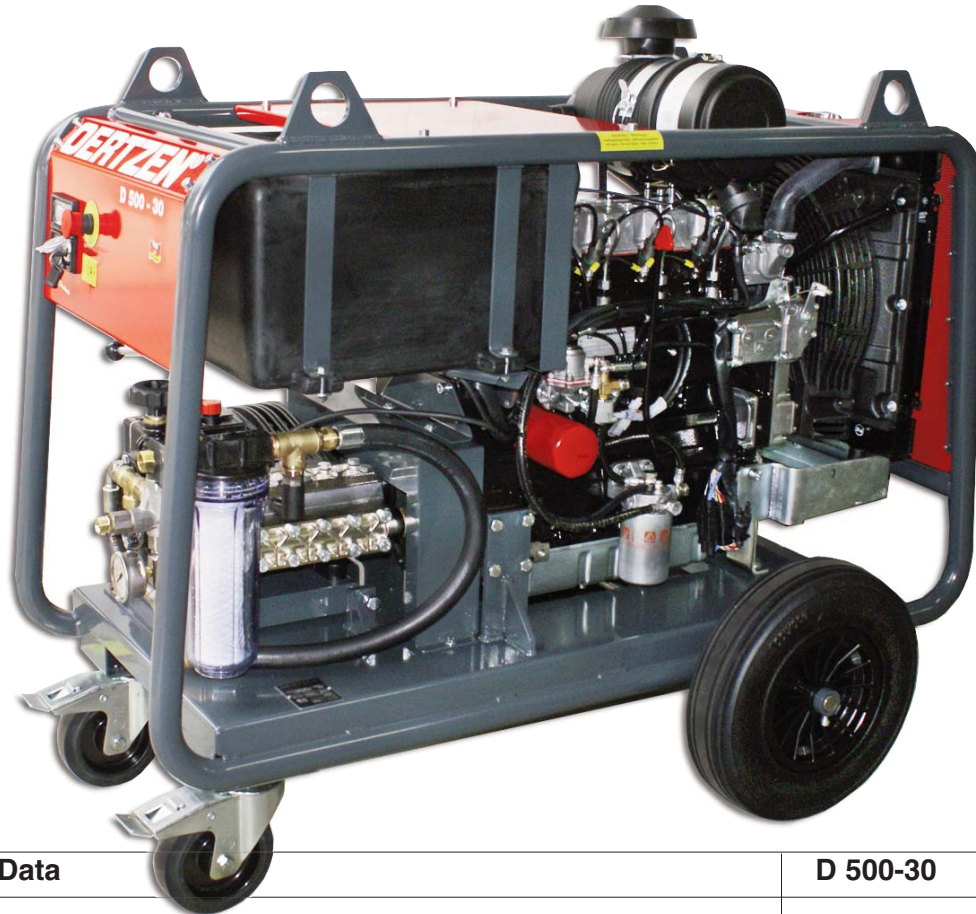

Technical Data	D 500-30
Flow rate max.	1800 l/h
Unloading pressure	520 bar
Working pressure max.	500 bar
Inline plunger pump	5 cyl., 30 l/min
Pump speed	1450 1/min
Diesel engine	4 cyl., water cooled
Power output	33 kW
Oil radiator	rpm control
Thermo valve	standard
Starter	battery
Stand-by operation	standard
Dimensions (LxWxH mm)	1370 x 820 x 1080
Weight	408 kg
Order No.	10.000.590



Standard equipment: 20 m PANZERJET high pressure safety hose, hose swivel, spray pistol, spray wand 700 mm with support handle, water filter 9.75", **option:** wheel kit 15.101.304 (illustrated above)